


TECHNICAL OFFER

PRC LEAD LASER π IF-3015 machine

With 1, 1.5, 2 kW, 3kW , 4 kW or 6 kW Fiber Laser

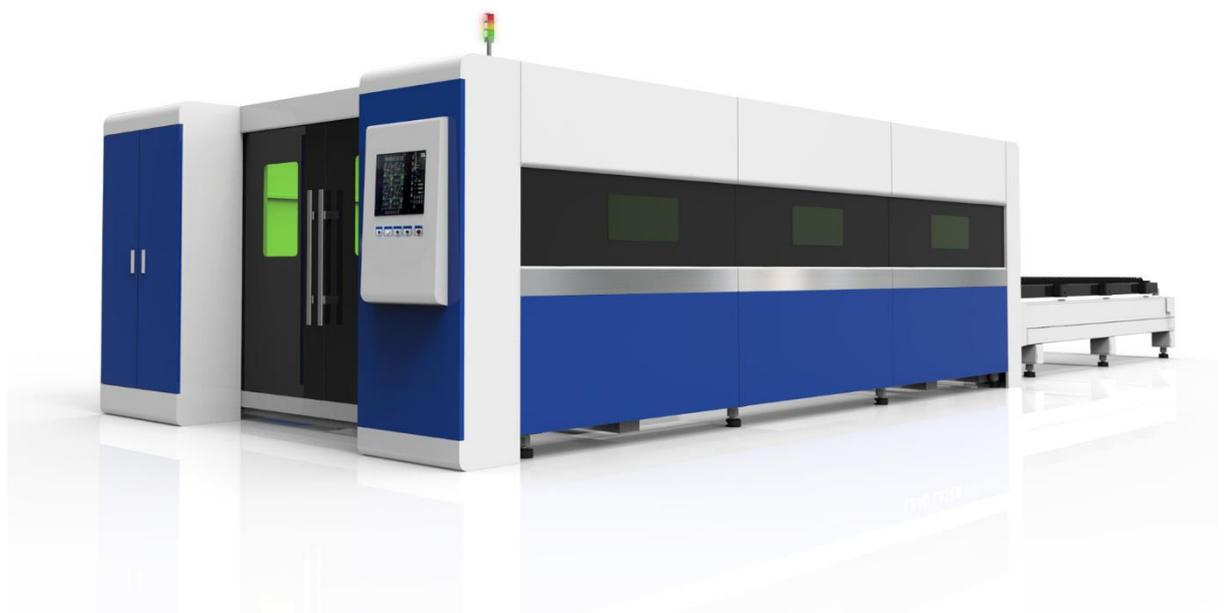

Head Office

PW Machine Services Limited

Fairfields, Barnsley Road, Brierley, Barnsley, South Yorkshire, S72 9LH


Email: pwmachineservices@outlook.com

Mobile: +44 (0) 7538 042579

GENERAL INFORMATION

MODEL

PRC Lead Laser LEAD πF-3015 for fiber-delivered laser cutting of sheet metal.

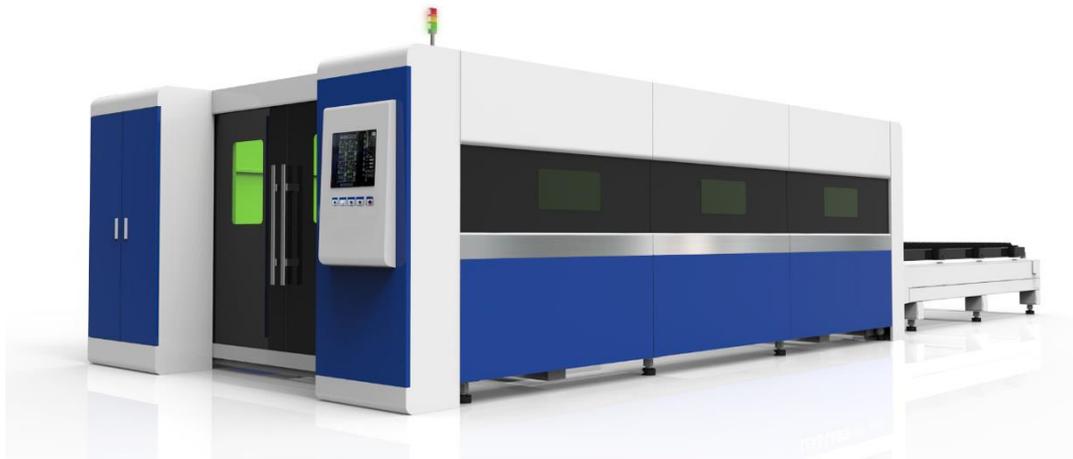

Description

The PRC Lead πF-3015 Laser Cutting machine is a double-drive gantry type flying optics laser cutting machine. It is designed to offer high dynamics during high-speed cutting of thin materials while having all the technology and know-how on board to produce stable and consistent parts in thicker material, where the maximum thickness is only limited by the output power of the laser. The fully covered machine assures a perfectly eye-safe operation.

Head Office

PW Machine Services Limited

Fairfields, Barnsley Road, Brierley, Barnsley, South Yorkshire, S72 9LH

Email: pwmachineservices@outlook.com

Mobile: +44 (0) 7538 042579

Bridge structure

Central in the design of the machine is the light-weight aluminum bridge which has been optimized to have an extreme high stiffness and allows the machine to reach very high dynamics without compromising the accuracy of the parts over the entire 1.5m span of the width of the working range. The compact design of the Z-axis offers an optimum weight distribution while keeping the access for the operator to the cutting head easy and straightforward. All critical parts are covered and well protected against dusts and smokes from the laser cutting process.

Transmission system



The powerful low-inertia servo motors with integrated gear-box provide the necessary torque to the high-precision rack and pinion drive system. This robust system offers the highest accelerations at maximum accuracy, no matter the length of the stroke of the axis in question. There is virtually no back-lash and the integrity and long life-time of the rack and pinion is guaranteed by an automatic central lubrication system providing a continuous lubricant to both the pinions of the X- and Y-axis transmission system and the carriages of the linear guides of the machine.

PRECITEC LIGHTCUTTER AUTO-FOCUS FIBER LASER CUTTING HEAD (UP TO 3 KW LASER POWER)



For Fiber lasers the fully automatic focus cutting head is recommended. This cutting head has all the features of the manual adjusted focus head, but additionally is equipped with a very fast auto-focus axis that will adjust the focus point dynamically during piercing and cutting according to the parameters stored in the on-line cutting database. Moreover this head has internal sensors that will detect possible problems before they result in bad processing: the internal optics temperatures are monitored, the actual cutting gas pressure inside the head and the occurrence of unwanted stray radiation of laser light inside the head. So, not only will this head provide superior cutting piercing and cutting results over manual adjusted focus heads because the optimum focus for both the piercing and cutting processes are automatically applied, it offers also further flexibility in the production: no extra manual operations are needed between the cutting of different materials.

Head Office

PW Machine Services Limited

Fairfields, Barnsley Road, Brierley, Barnsley, South Yorkshire, S72 9LH

Email: pwmachineservices@outlook.com

Mobile: +44 (0) 7538 042579

PRECITEC PROCUTTER HIGH-POWER AUTO-FOCUS FIBER LASER CUTTING HEAD (>3 KW LASER POWER)



For higher power lasers (>3kW) the fully automatic focus cutting head is recommended. This cutting head has all the features of the manual adjusted focus head, but additionally is equipped with a very fast auto-focus axis that will adjust the focus point dynamically during piercing and cutting according to the parameters stored in the on-line cutting database. Moreover this head has internal sensors that will detect possible problems before they result in bad processing: the internal optics temperatures are monitored, the actual cutting gas pressure inside the head and the occurrence of unwanted stray radiation of laser light inside the head. So, not only will this head provide superior cutting piercing and cutting results over manual adjusted focus heads because the optimum focus for both the piercing and cutting processes are automatically applied, it offers also further flexibility in the production: no extra manual operations are needed between the cutting of different materials and thanks to the integrated sensors, possible problems are detected before they cause break-downs or loss of production quality.

Cutting gas system



Up to three types of assist gasses can be connected to the PRC Lead π IF-3015 machine. An automatic gas selection valve will supply the right gas for each application. The fast reaction times of the servo valve and the short supply lines from the valve to the cutting head allow fast changes in gas pressure between piercing and cutting process without a need for any dwell times. This way, the extreme fast cutting gas supply system goes hand in hand with the high dynamics of the cutting head and machine movements and guarantees stable laser processing.

CNC Control system



The PRC Lead π IF-3015 Laser machine is equipped with a high-quality state-of-the-art German CNC system with integrated power supply and multi-axis drive technology. The numerical control is a compact, flexible, robust system with an integrated safety solution for automation. Specific for the high requirements of laser processing, the system has integrated extremely fast inputs and outputs for all laser process specific signals. The motion control is designed to allow high dynamic interpolated axis movements with great precision. The numerical control and the PLC are implemented on a dedicated powerful processor. All communication between the CNC, the integrated PLC and the different laser system components goes over a digital field-bus using EtherCAT technology.

Head Office

PW Machine Services Limited

Fairfields, Barnsley Road, Brierley, Barnsley, South Yorkshire, S72 9LH

Email: pwmachineservices@outlook.com

Mobile: +44 (0) 7538 042579

Shuttle table

The operation of the shuttle table is full-automatic and completely integrated with the safety light curtain system around it to protect the operator.

Suction circuit under cutting table

The working area under the cutting table of the PRC Lead π IF-3015 is divided into separate sections from where dust and smoke can be extracted efficiently. The air from the dust collector is guided through two channels inside the machine frame where a pneumatic system will make sure that only that area where the cutting head is processing will be extracted by the air flow from the external air filter unit. Scrap pieces and heavy dust will fall through the cutting tables into separate boxes that can easily be taken away from the side of the machine.

Electrical cabin

The electrical cabin is mounted in the front of the machine frame of the PRC Lead π IF-3015, allowing a quick installation of the machine and a very compact factory lay-out. The electrical cabinet is kept cool and dry with an air conditioner. All air, water and gas connections are easily accessible in a separate cabinet.

Operator panel



The operator panel of PRC Lead Laser IF-3015 is built with a high definition 21.5" screen. It is a full multi-touch screen where the Lead Laser Suite[®] comprehensive graphical user interface is displayed. Most of the functions are activated by a simple button on the screen, no complex interactions, sequences or program manipulations are necessary. Ease of operation and an intelligent machine control have been a central criterion in the concept design of the Lead Laser Suite[®] platform for our laser cutting machines. The operator panel includes a mouse and keyboard and an industrial grade control panel with push buttons.

Head Office


PW Machine Services Limited

Fairfields, Barnsley Road, Brierley, Barnsley, South Yorkshire, S72 9LH

Email: pwmachineservices@outlook.com


Mobile: +44 (0) 7538 042579

4) Machine interface

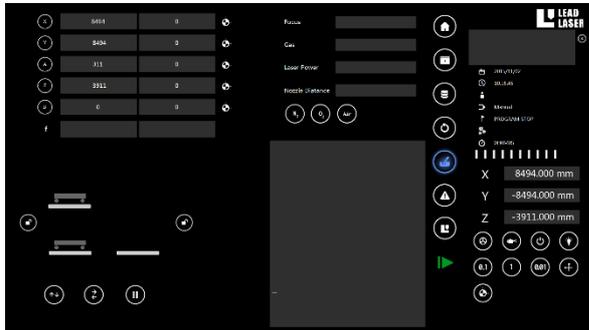


A more traditional machine interface screen shows all operation conditions of the machine together with the feed-back values from the integrated process sensors. An easy interface allows both manual and automatic operation of the shuttle table. At all times, the main features of the machine can be activated by the software control panel buttons on the right of the screen (and for left-handed operators: on the left of the screen).

5) Manual programming

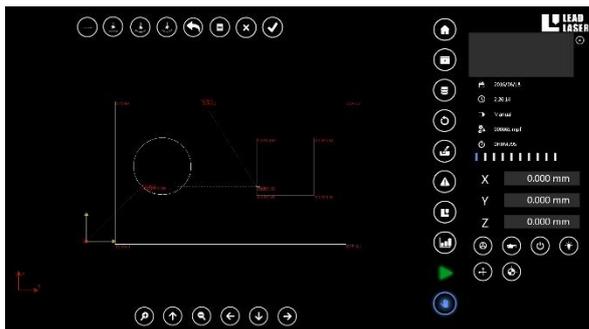

Simple programs can be made on the machine itself. An intuitive interface allows you to select graphical elements (lines and arcs) to draw simple parts. While programming the part in this graphical way, the part is drawn simultaneously indicating all relevant points and movements, so it is easy to detect mistakes and correct them immediately. Once the part is drawn, the relevant laser cutting and piercing technologies are selected and the machine code is generated, of course all automatically.

6) Single part nesting

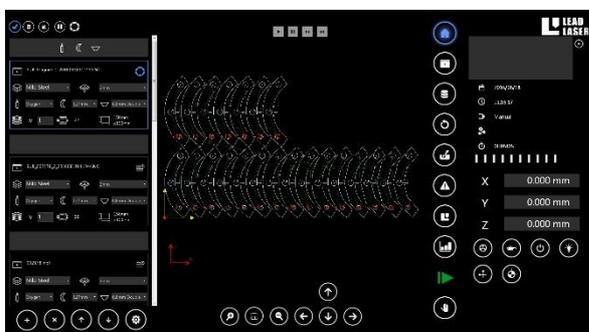

Any part in the part database can be selected and then nested automatically with no more necessary information than the available sheet size and the amount of parts needed. Both the distance between the parts and the order in which to cut the parts can also be modified if necessary: first cut all parts along the X-direction or first along the Y-direction. This feature gives full flexibility for the operator to produce additional parts if necessary on any sheet remnant without the need of having a new program made.

7) Reporting feature




PRC Lead Laser Suite© can automatically generate reports about the use of the machine. Ready available reports are daily reports of how much time or how much percent of time the machine was running programs, how much time or percentage of time it was in stand-by and how much time or how much percentage of time it was in alarm status. Reports on the actual production time can be generated by day, by week, by month and even by year. PRC Lead Laser Suite© also keeps track how much kg has been cut in which material and what thickness, again on daily, weekly, monthly or yearly basis. Even the amount of parts and programs that have been finished are kept in the database. Upon demand these reports can be exported in different file formats or even be sent on regular basis over the network to an external ERP or MES system. If other specific reports are required, the development team at Lead Laser can provide these upon request. PRC Lead Laser Suite© is the ultimate tool to help you optimize the use of the machine, the production planning and even the material flow in the factory.

8) Features

The most important PRC Lead Laser Suite[®] additional features are:

- Skeleton cutting function: if a nesting has been cut on a sheet which can still be used for another job, the remains of the sheet can be cut out nicely in any possible shape by a simple teach-in of the machine.
- Graphical restart: the machine can be restarted on any point by a simple mouse-click on the exact point of the part geometry where a restart is required.
- Automatic micro-joints: if micro-joints were not included in a certain program, but show to be important, the operator can add a simple micro-joint on the end of every contour inside the PRC Lead Laser Suite[®] with one single button.
- Automatic sheet probing: the zero-point and the orientation of any rectangular sheet can be automatically found.
- Automatic pallet change: an automatic pallet change can be commanded from the PRC Lead Laser Suite[®]
- Automatic machine calibration: the calibration of basic machine functions as the capacitive distance control or the servo gas valve can be performed at any time.
- Obviously, all the advanced laser cutting technology on-board is managed by PRC Lead Laser Suite[®] software:
 - ✓ Adaptive corner pulse and laser power modulation: optimum cutting results in corners of parts are obtained by the adjusting the pulse characteristics and the laser power according the momentary cutting speed at all times.
 - ✓ Lead-in transition function: in order to establish a stable cutting after the piercing procedure, the machine will make a smooth transition of cutting parameters according the application demands on the lead-in towards the cutting contour.
 - ✓ Fly cutting: in materials where no piercing is necessary, the laser beam will be switched on and off “on the fly” during the dynamic axis movements which guarantees the fastest possible cycle times in high speed cutting of thin materials.
 - ✓ Multi-step piercing procedure: the piercing process can be performed in several steps in which every parameter can be controlled individually, allowing a complete control of the process.

9) Off-Line Programming software (Not included)

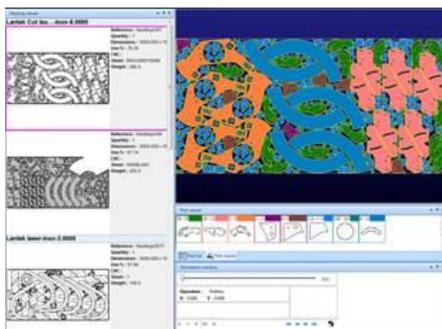

- The PRC Lead Laser machine can be delivered with Off-line software for nesting and programming. Libellula and PRC Lead Laser Suite[®] share a common database with all materials and thicknesses and their corresponding cutting and piercing technology parameters, allowing a simple one-button starting of each task on the machine. The configuration of all cutting and piercing technologies in Libellula is fully automatic and pre-defined for every PRC Lead machine.

Head Office

PW Machine Services Limited

Fairfields, Barnsley Road, Brierley, Barnsley, South Yorkshire, S72 9LH

Email: pwmachineservices@outlook.com

Mobile: +44 (0) 7538 042579

PRC FIBER LASER SOURCE

PRC Fiber laser source features high electrical efficiency, superior optical beam quality, high stability and extremely long lifetime. The lasers are available for a wide variety of industry application, and different power levels. (1 to 6 kW for Pi-IF3015 machines).



Water Chiller



The delivery of the machine includes a chiller that matches the cooling requirements of both the laser source and the external optical systems of the machine. All systems come with a dual circuit chiller that is specially designed to have the laser source cooled at lower temperature, while a higher temperature cooling water output is maintained for cooling of the external optics to avoid condensation. The temperature stability of the low temperature cooling water circuit is $\pm 1^{\circ}\text{C}$, which guarantees the stability of the laser output power.

Dust collector (OPTION)



The dust collector delivered with the Laser machine is a dust and fume collection system specifically engineered for various laser applications including laser cutting and welding. The dust collector uses unique oval-shaped cartridge filters making dust and fume filtration more efficient, compact and cost-effective. The dust collector can be installed in a corner and even outdoor installation is possible, providing additional flexibility in adapting the machine installation to the existing factory lay-out.

Head Office

PW Machine Services Limited

Fairfields, Barnsley Road, Brierley, Barnsley, South Yorkshire, S72 9LH

Email: pwmachineservices@outlook.com

Mobile: +44 (0) 7538 042579

TECHNICAL SPECIFICATION

The technical specifications of PRC Lead πIF-3015 are summarized below:

Item	Specification	Unit
Cutting area	3000 × 1500	mm x mm
X- and Y-axis positioning accuracy	±0.03	mm/m
Maximum stroke X and Y axis	3050 x 1550	mm x mm
Repositioning accuracy	±0.02	mm
Maximum positioning speed X- and Y-axis	80	m/min
Maximum simultaneous X- and Y-axis positioning speed	110	m/min
Maximum acceleration X- and Y-axis	9	m/s ²
Maximum simultaneous X- and Y-axis acceleration	>12	m/s ²
Maximum Z-axis acceleration	15	m/s ²
Maximum sheet weight	1000	kg
Machine weight (including shuttle table)	8300	kg
Basic machine main dimensions	8880 x 3075 x 2100	mm x mm x mm
Maximum pressure oxygen cutting gas	10	bar
Maximum pressure nitrogen cutting gas	25	bar
Maximum pressure third cutting gas	25	bar
Minimum compressed air inlet pressure	6	bar
Maximum compressed air consumption	5	NI/s

Head Office

PW Machine Services Limited

Fairfields, Barnsley Road, Brierley, Barnsley, South Yorkshire, S72 9LH

Email: pwmachineservices@outlook.com

Mobile: +44 (0) 7538 042579

STANDARD EQUIPMENT

A PRC Lead πIF-3015 delivery includes the following standard equipment:

- LTi-Andronic “System One” CNC control (German) with large virtually program memory
- LTi Motion digital servo drives and motors (German) for X-axis gantry, Y- and Z-axis
- Pneumatic system made by SMC、 Sang-A
- Gearbox made by Germany WITTENSTEIN
- The gear and rack made by imported LINDE company
- Linear guide made by HIWIN
- Precitec Cutting head for fiber-delivered laser source (German)
- Scrap boxes for scrap and dust removal from under the working area of the machine
- Seal protection for transmission system
- Central lubrication system
- Automatic gas selection valve for three different assist gases (SMC or Hoerbiger)
- Automatic cabin lighting
- Water Chiller for fiber laser source
- CE certified safety light curtain around the shuttle table
- An automatic shuttle table for nearly continuous cutting operation. And Two cutting tables with supporting grids
- Air conditioner for the electrical cabinet
- PRC Fiber Laser source
- Flying piercing function
- Frog- jumping function
- Oversea transport packaging
- Spare parts included in the delivery:
 - ✓ Single nozzle, 1.5 mm diameter: 5 pieces
 - ✓ Single nozzle, 2.0 mm diameter: 5 pieces
 - ✓ Single nozzle, 2.5 mm diameter: 5 pieces
 - ✓ Double nozzle, 2.0 mm diameter: 5 pieces
 - ✓ Double nozzle, 2.5 mm diameter: 5 pieces
 - ✓ Ceramic part for capacitive distance sensor: 2 pieces
 - ✓ Protective mirror: 2 pieces
 - ✓ Filter element: 2 pieces
 - ✓ Tool attachment : 1 set

Head Office

PW Machine Services Limited

Fairfields, Barnsley Road, Brierley, Barnsley, South Yorkshire, S72 9LH

Email: pwmachineservices@outlook.com

Mobile: +44 (0) 7538 042579

INSTALLATION REQUIREMENTS

The basic installation requirements for PRC LEAD π IF-3015 are:

Item	Requirement
Power supply	3 x 400 V at 50 Hz
Power supply voltage fluctuations	< 5%
Power supply (Depending of laser power)	> 30 kVA
Ground resistance	< 10 Ω
Compressed air: maximum size of solid particles	5 μm (ISO 8573-1 Class 3)
Compressed air: maximum concentration of solid particles	5 mg/m^3 (ISO 8573-1 Class 3)
Compressed air: maximum dew point temperature	3 $^{\circ}\text{C}$ (ISO 8573-1 Class 4)
Compressed air: maximum oil content	1 mg/m^3 (ISO 8573-1 Class 3)
Maximum ambient temperature for operation of machine	30 $^{\circ}\text{C}$
Minimum ambient temperature for operation of machine	5 $^{\circ}\text{C}$
Maximum ambient relative humidity for operation of machine	70 %RH
Minimum purity of oxygen assist gas	> 99.95%
Minimum purity of nitrogen assist gas	> 99.95%

Head Office

PW Machine Services Limited

Fairfields, Barnsley Road, Brierley, Barnsley, South Yorkshire, S72 9LH

Email: pwmachineservices@outlook.com

Mobile: +44 (0) 7538 042579